

D365PL(A) and DNRW

Intelligent Non-relay Photoelectric Duct Smoke Detectors



Addressable Devices

The Fire•Lite D365PL(A) intelligent non-relay photoelectric duct smoke detector and DNRW watertight non-relay photoelectric duct smoke detector feature a pivoting housing that fits both square and rectangular footprints capable of mounting to a round or rectangular duct.

The DNRW duct smoke detector, with its NEMA-4 rating, is listed as a watertight, UV resistant enclosure providing protection against falling dirt, rain, and windblown dust, splashing and hose directed water, allowing operators to use the detector in the most extreme environments.

These units sense smoke in the most challenging conditions, operating in airflow speeds of 100 to 4,000 feet per minute (0.5 – 20.32 m/s), temperatures of -4°F – 158°F (-20°C – 70°C), and a humidity range of 0 – 93 percent (non-condensing).

An improved cover design isolates the sensor head, which allows for ease of maintenance. A cover tamper feature indicates a trouble signal for a removed or improperly installed sensor cover. The housing provides a 3/4-inch conduit knockout and ample space to facilitate easy wiring and mounting of a relay module.

The Fire•Lite D365PL(A) duct smoke detectors can be customized to meet local codes and specifications without additional wiring and are compatible with all previous models, including remote test accessories.

Features

- Photoelectric, integrated low-flow technology
- Air velocity rating from 100 ft/min – 4,000 ft/min (0.5 m/s – 20.32 m/s)
- Versatile mounting options: square or rectangular configuration
- Broad ranges for operating temperature (-4°F – 158°F, -20°C – 70°C) and humidity (0% – 93% non-condensing)
- Sampling tube installs from front or back of the detector with no tools required
- Cover tamper signal
- Increased wiring space with a newly added 3/4" conduit knockout
- Easily accessible code wheels on sensor head (Included with D365PL/D365PLA)
- Clear cover for convenient visual inspection (D365PL(A) only)
- Remote testing capability
- Requires com line power only
- Housing accommodates an addressable relay module, sold separately, (CRF-300) for applications requiring a Form-C relay

Specifications

Size: (Rectangle) 14.38 in (37 cm) Length; 5 in (12.7 cm) Width, 2.5 in (6.6 cm) Depth

Size: (Square) 7.75 in (19.7 cm) Length; 9 in (22.9 cm) Width; 2.5 in (6.35 cm) Depth


Weight: 1.6 lb (0.73 kg)

Operating Temperature Range: -4°F – 158°F (-20°C – 70°C)

Storage Temperature Range: -22°F – 158°F (-30°C – 70°C)

Operating Humidity Range: 0% – 93% relative humidity (non-condensing)

Air Duct Velocity: 100 – 4,000 ft/min (0.5 – 20.32 m/s)

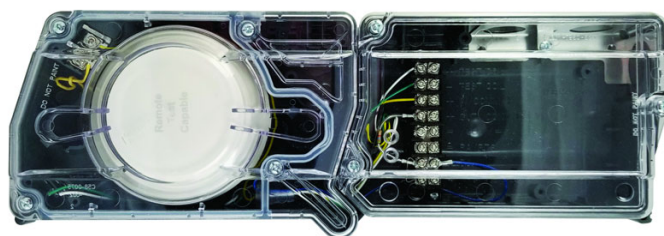

Accessories

Fire•Lite provides system flexibility with a variety of accessories, including two remote test stations and different means of visible and audible system annunciation. As with our duct smoke detectors, all duct smoke detectors accessories are UL listed.

ACCESSORY CURRENT LOADS AT 24 VDC

| Device | Standby | Alarm |
|------------------|---------|----------|
| RA100Z | 0mA | 12mA Max |
| RTS151/RTS151KEY | 0mA | 12mA Max |

Agency Listings and Approvals

Consult product manual for lists of compatible UL-Listed devices. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S1059
- **ULC:** S1059
- **CSFM:** 3242-0075:0508
- **FM approved**

Product Line Information

NOTE: "A suffix indicates ULC listed model.

D365PL(A): Intelligent non-relay photoelectric low flow smoke detector housing. Includes SD365R(A)-IV detector.

DNRW: Watertight intelligent non-relay photoelectric low flow duct smoke detector housing. Requires photoelectric smoke detector (sold separately). NEMA-4 rated.

SD365R(A)-IV: Remote test capable addressable low-profile photoelectric smoke detector; ivory; supports CLIP and LiteSpeed™ protocols

SD365R(A): Remote test capable addressable low-profile photoelectric smoke detector; white; supports LiteSpeed protocol only

SD365(A)-IV: Addressable low-profile photoelectric smoke detector; ivory; supports CLIP and LiteSpeed protocols

SD365(A): Addressable low-profile photoelectric smoke detector; white; supports LiteSpeed protocol only

SD365T(A): Addressable low-profile photoelectric smoke detector with a built-in 135°F (57°C) fixed-temperature thermal device; white; supports LiteSpeed protocol only

SD365T(A)-IV: Addressable low-profile photoelectric smoke detector with a built-in 135°F (57°C) fixed-temperature thermal device; ivory; supports LiteSpeed protocol only

DUCTCOV: Retrofit D355PL(A) cover for detectors manufactured prior to April 2014

DUCTCOVW: Retrofit DNRW cover for detectors manufactured prior to April 2014

DST1: Metal sampling tube duct width up to 1 ft (0.3 m)

DST1.5: Metal sampling tube duct widths up to 1 ft – 2 ft (0.3 – 0.6 m)

DST3: Metal sampling tube duct widths up to 2 ft – 4 ft (0.6 – 1.2 m)

DST5: Metal sampling tube duct widths up to 4 ft – 8 ft (1.2 – 2.4 m)

DST10: Metal sampling tube duct widths up to 8 ft – 12 ft (2.4 – 3.7 m)

DH400OE-1: Weatherproof enclosure

ETX: Metal exhaust tube duct, width 1 ft (0.3 m)

M02-04-00: Test magnet

P48-21-00: End cap for metal sampling tubes

RA100Z(A): Remote annunciator alarm LED

RTS151: Remote test station

RTS151KEY(-A): Remote test station with key lock

LiteSpeed™ is a trademark; and Fire•Lite® Alarms is a registered trademark of Honeywell International Inc.
©2021 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.
www.firelite.com

Country of Origin: Mexico